


Deck Machinery

Electrically driven deck machinery

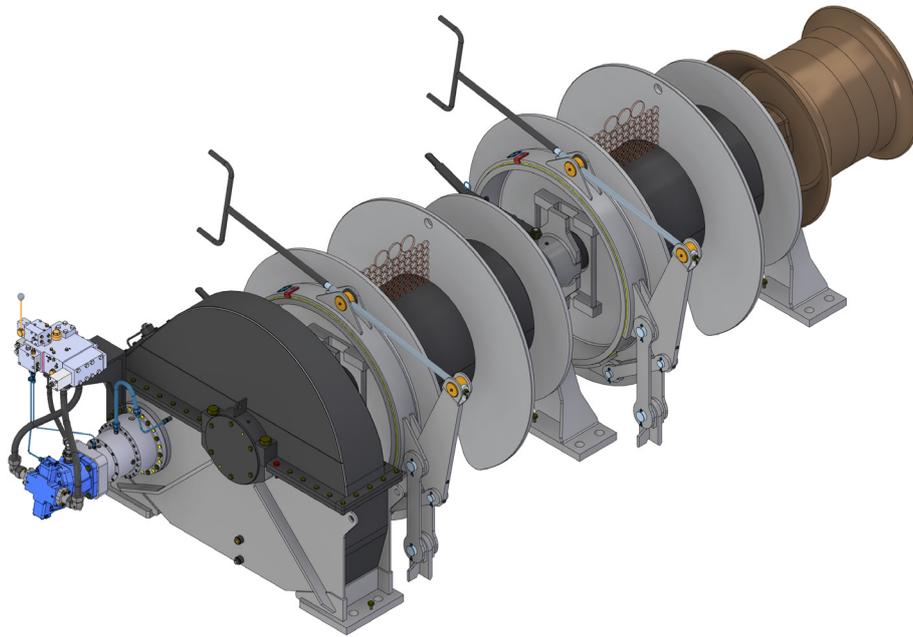


Standard specifications

- Pulls 160 - 350kN
- Chain diameters for 66 - 147 mm stud link chains and roller stoppers (bigger chain diameters on request)
- Single, double or triple drum design
- Undivided or split-type drums
- With or without auto-tension device
- With pole-changing motor or frequency-controlled for stepless speed control
- With or without remotely controlled letting-go the anchor, with automatic speed limitation
- With or without chain length and speed indication
- With or without remote control from ships' sides or wheelhouse
- Acc. ISO 3730 and OCIMF recommendations
- Different foundation types (strip, bolt, self-aligned)

Portfolio

- Mooring winches
- Combined anchor-mooring-winches
- Windlasses

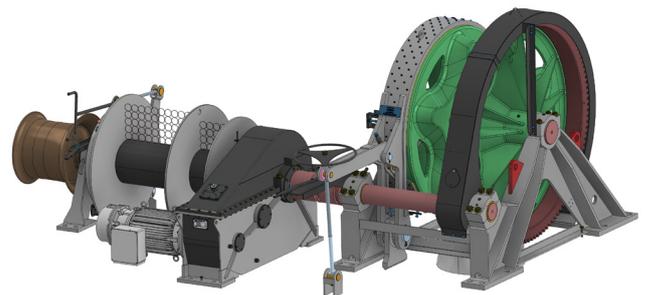

MacGregor shapes the offshore and marine industries by offering world-leading engineering solutions and services with a strong portfolio of MacGregor, Hatlapa, NMF, Porsgrunn, Pusnes, Rapp, Triplex and TTS brands. Shipbuilders, owners and operators are able to optimise the lifetime profitability, safety, reliability and environmental sustainability of their operations by working in close cooperation with MacGregor.